



SX-TERM-1 BC


Termination Kit

Installation Instructions

Applications:


The SX-TERM-1 BC kit is used for end-of circuit & power termination of braided Self Regulating Cables.

Components - Kit Part No. - 119-5050

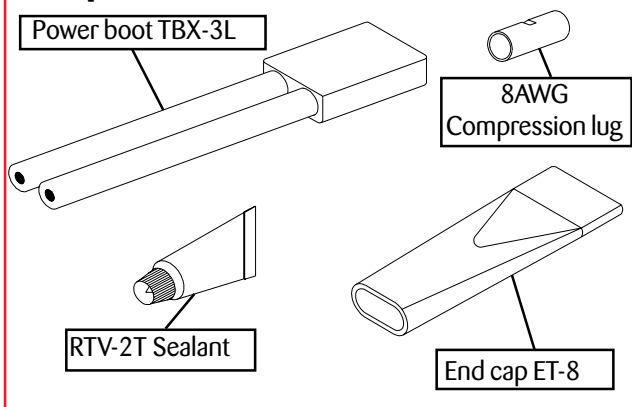


Power Connection:

- 1 Twist metallic braid back 140mm from the cable end for connection to ground. Remove 115mm of the insulating jacket and semi-conductive matrix between the bus wires, making sure the cable bus wires are not damaged.

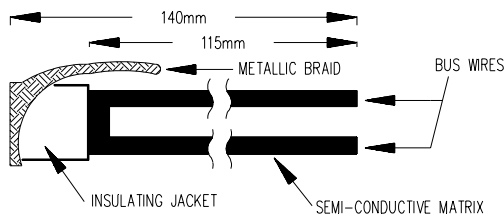


- 2 Apply a generous amount of RTV-2 sealant inside the TBX-3L boot. Push boot over the bus wires so that the boot fully overlaps the primary cable insulation and the bus wires extend through the "legs" of the boot 13-25mm. Metallic braid is not to be run through the boot with the bus wires. Squeeze the boot to work out any air pockets and wipe off excess sealant.

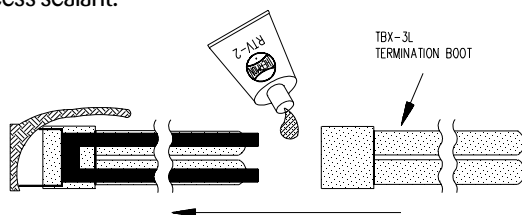


End Termination:


- 1 Slide braid back 38mm & then cut 18mm off the exposed heater cable.




- 2 Apply RTV-2 sealant generously to the inside of the ET-8 end cap & onto the end of the cable.

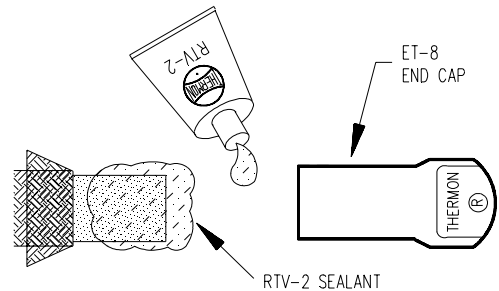

- 3 Slide the end cap onto the cable with a twisting motion, making sure to work out any air pockets. Wipe off the excess sealant. Pull the braid over the end cap & then crimp together the braid ends with the 8-AWG compression lug supplied.

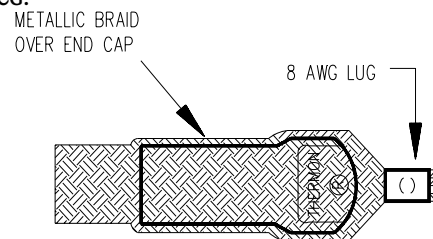

Caution: Do NOT connect the bus wires together at the end termination. Doing so will result in a direct short and could damage the cable



ALL Electric Heat Tracing requires an Earth Leakage Device fitted to Power Source
As Per AS/NZS3000:2007

THERMON AUSTRALIA PTY. LTD.

30 London Drive • P.O. Box 532 • Bayswater • Victoria 3153 • Australia Phone: + 61 3 9762 6900 • Fax: + 61 3 9762 9519
www.thermon.com E-mail: aus.sales@thermon.com