
## INSTRUCTION MANUAL L450K-2 / L450STSTK-2

### **Install Pack Includes**

Fixing bolts for fastening outdoor unit 4xM8\*30mm Hexagonal bolts 4x washers



4x pre-assmbled rubber mounts



Anchor bolts for fastening to the wall

4x M8\*80mm expansion bolts




### Installation

Ensure the bracket is securely fixed to a solid base to hold the load. **Note:** Wall strength varies.

Care must be taken to use appropriate lifting methods when using these brackets, excessive force should be avoided. The brackets have a preset angle to accommodate typical split systems.


The rear adjustment screws should be used to level the bracket, the amount of leveling required is dependant on the weight of the unit and the application.

Step 1: Unfold the brackets.




Step 2: Adjust the horizontal and vertical position of the arms, fix bracket to the wall with expansion bolts. Level vial is needed to align the 2 arms.


Step 3: Fix A/C unit to bracket with hexagonal bolts &rubber mounts Note: Tighten the hexagonal bolts on the brackets.

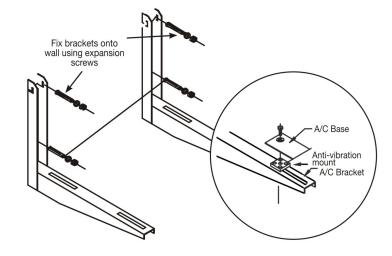

### **Specification**



ITEM NO.	<b>A</b> (mm)	<b>B</b> (mm)	C (mm)	<b>LOAD</b> (kg)
L450K-2 / L450STSTK-2	350	450	340	120




FREDDOXINSTRUCTMANUAL\_L450K-2/L450STSTK-2\_1222




## INSTRUCTION MANUAL L550K-2 / L550STSTK-2

#### **Install Pack Includes**

Fixing bolts for fastening outdoor unit 4xM8\*30mm Hexagonal bolts 4x washers



4x pre-assmbled rubber mounts



Anchor bolts for fastening to the wall

6x M8\*80mm expansion bolts



### Installation

Ensure the bracket is securely fixed to a solid base to hold the load. **Note:** Wall strength varies.

Care must be taken to use appropriate lifting methods when using these brackets, excessive force should be avoided. The brackets have a preset angle to accommodate typical split systems.


The rear adjustment screws should be used to level the bracket, the amount of leveling required is dependant on the weight of the unit and the application.


Step 2: Adjust the horizontal and

Step 1: Unfold the brackets.




Step 3: Fix A/C unit to bracket with hexagonal bolts &rubber mounts Note: Tighten the hexagonal bolts on the brackets.





### **Specification**



ITEM NO.	<b>A</b> (mm)	<b>B</b> (mm)	C (mm)	LOAD (kg)
L550K-2 / L550STSTK-2	450	550	430	150

**≓** freddox


# INSTRUCTION MANUAL L450ADJBARK-2 / L450ADJBARSTK-2

#### **Install Pack Includes**

Fixing bolts for fastening outdoor unit 4xM8\*30mm Hexagonal bolts 4x washers



4x pre-assmbled rubber mounts



Anchor bolts for fastening to the wall 4x M8\*80mm expansion bolts 4x washers



#### Installation

Ensure the bracket is securely fixed to a solid base to hold the load. Note: Wall strength varies.

Care must be taken to use appropriate lifting methods when using these brackets, excessive force should be avoided. The brackets have a preset angle to accommodate typical split systems.

The rear adjustment screws should be used to level the bracket, the amount of leveling required is dependant on the weight of the unit and the application.

Step 1: Fix the back bar to the wall with expansion bolts. Note: A liquid level is recommended.

Step 2: Unfold the brackets, mount to the back bar, adjust the space of the arms to fit the A/C unit.


Step 3: Fix bracket to the wall with additional expansion bolts. One bolt to fix the adjustable arm holding the heavy side of the A/C unit is recommended. Step 4: Fix A/C unit to bracket with hexagonal bolts & rubber mounts Note: Tighten the hexagonal bolts on the bracket.




NB: Stick the liquid level here when installing (optional)







### **Specification**



ITEM NO.	<b>A</b> (mm)	<b>B</b> (mm)	C (mm)	<b>D</b> (mm)	LOAD (kg)
L450ADJBARK-2 L450ADJBARSTK-2	350	450	340	700	120

FREDDOXINSTRUCTMANUAL\_L450ADJBARK-2/L450ADJBARKSTK-2\_1222



# INSTRUCTION MANUAL L550ADJBARK-2 / L550ADJBARSTK-2

#### **Install Pack Includes**

Fixing bolts for fastening outdoor unit 4xM8\*30mm Hexagonal bolts 4x washers



4x pre-assmbled rubber mounts

Anchor bolts for fastening to the wall

5x M8\*80mm expansion bolts



### Installation

Ensure the bracket is securely fixed to a solid base to hold the load. Note: Wall strength varies.

Care must be taken to use appropriate lifting methods when using these brackets, excessive force should be avoided. The brackets have a preset angle to accommodate typical split systems.

The rear adjustment screws should be used to level the bracket, the amount of leveling required is dependant on the weight of the unit and the application.

Step 1: Fix the back bar to the wall with expansion bolts. Note: A liquid level is recommended.


Step 2: Unfold the brackets, mount to the back bar, adjust the space of the arms to fit the A/C unit.

Step 3: Fix bracket to the wall with additional expansion bolts. One bolt to fix the adjustable arm holding the heavy side of the A/C unit is recommended.

Step 4: Fix A/C unit to bracket with hexagonal bolts & rubber mounts Note: Tighten the hexagonal bolts on the bracket.




NB: Stick the liquid level here when installing (optional)



NB: Hex Screw are pre fitted to brackets





### **Specification**



ITEM NO.	<b>A</b> (mm)	<b>B</b> (mm)	C (mm)	<b>D</b> (mm)	LOAD (kg)
L550ADJBARK-2	450	550	430	1000	150
L550ADJBARSTK-2	450	550	430	850	150

FREDDOXINSTRUCTMANUAL\_L550ADJBARK-2/L550ADJBARKSTK-2\_1222

