

# *Free Match Multi Split System*



# Gree Free Match Multi Explanation



## **Gree Free Match Multi Explanation**

As the name suggests, you are free to mix and match a number of units and unit types, depending on the space or budget.

The Gree Free Match system allows you to connect up to 4 indoor units to a single outdoor unit.

The indoor units can be different types and or capacities which means you can customize your heating and cooling needs specifically for your home or office.

This allows you complete temperature control over your entire home or office environment, which gives increased comfort and greater efficiency.

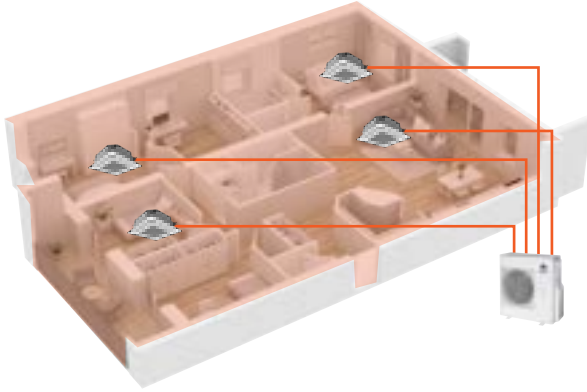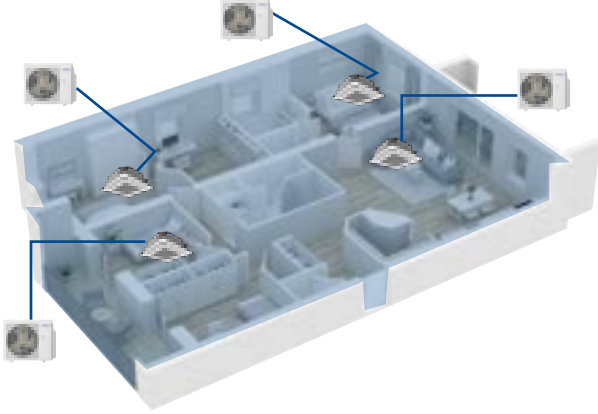Free Match	Residential AC
1 outdoor unit can connect up to 4 indoor units.	1 outdoor unit can connect 1 indoor unit only.
Cost-saving for installation.	High cost for installation.
Wide range & types of indoor units can be selected by users.	Limited types of indoor units can be selected by users.
Space-saving for outdoor unit placement.	Affect the appearance of the whole building with too many outdoor units.
High efficiency for centralised control of all indoor units.	Low efficiency for the individual control of different indoor units.
	

## **R32 Refrigerant**

Gree's new Free Match range replaces that R410a refrigerant currently used with the more efficient and lower environment impacting refrigerant: R32.

R32 refrigerant has an ozone depletion level of zero and its global warming potential is 677, which is 1/3 that of R410a at 2088.

Not only does R32 have less impact on global warming, it is also 8% more efficient than R410a. This means a smaller refrigerant charge is required, further decreasing the units carbon emission ratio.

# Free Match Flexibility

## *Gree Free Match Flexibility*

---

Gree Free Match does what its name suggests, giving the customer the flexibility to use different types and sizes of Air Conditioners, perfectly matched to the space.

Gree Free Match outdoor units are designed with redundancy in mind, during typical use, not all rooms will need to be heated or cooled at the same time or rate, thus excess capacity is created.

Gree Free Match can be connected to 50% more capacity of the indoor unit when compared with the outdoor unit. As each room is individually controlled, this gives maximum control over temperature and air flow thus creating greater comfort.

## *Free Match Combinations*

---





# Free Match Control Options

## Gree Free Match Control Options

---

- Gree Free Match units can be connected to a range of indoor units. This allows a wide range of control options to be used.
- All hi-walls, cassettes and floor consoles come with a standard wireless remote controller.
- Ducted units come standard with a wired wall controllers and these can also be fitted to the other units.
- Wi-Fi comes as standard on the hi-walls and floor console units.
- Through the wired wall controllers a central controller can be fitted.



### YAP1F7 (WiFi)

---

- Pular Standard
- I Feel
- Turbo
- X fan
- Light
- Colasma



### XK76

---

Optional wired wall controller for all hi-walls and mini floor console.



### YAG1F

---

- Hyper Standard
- I Feel
- Turbo
- X fan
- Light
- Adjustable Auto



### XK19

---

Standard wired wall controller with all Bulkhead units.



### CE52-24/F(C)

---


Central Controller.

# Wi-Fi Options Free Match Indoor Units

## Wi-Fi Options



- Wi-Fi standard on Hyper, Pular and Mini Floor Console.
- Optional on Bulkhead and Cassette (XE72-44/E).
- Download the Gree+ app on iPhone or Android from the app store.

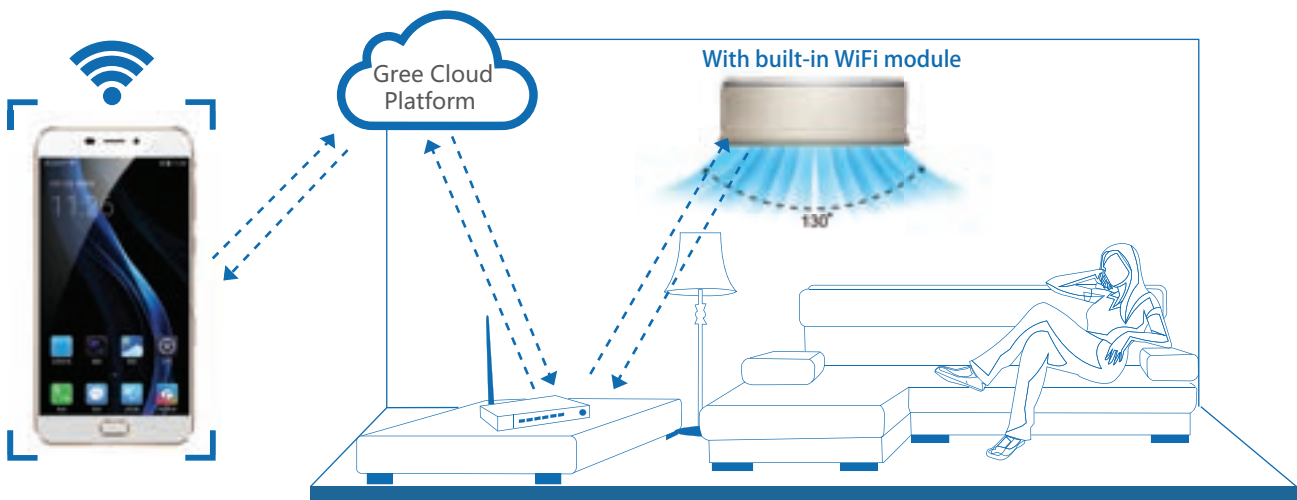

Scan QR Code & Download Gree+ APP



# Hyper Free Match Hi-wall Indoor Units



XK76 (Optional)




YAG1F

The Gree Hyper range of hi-wall indoor units brings a sleek contemporary look to your home. The Hyper indoor units feature Gree's latest technology, reliability and performance.



## Hyper Features

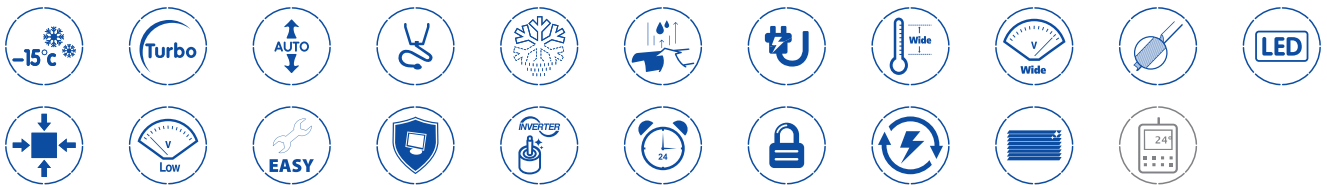

Series		Hyper					
Reacold Part No.		AC7232-I	AC7233-I	AC7204-I	AC7235-I	AC7206-I	AC7237-I
Indoor Model No.		GWH09ABA-K6DNC8C-I	GWH12ABA-K6DNC8C-I	GWH15QD-K6DNC8A-I	GWH18QE-K6DNC8A-I	GWH21QE-K6DNC8A-I	GWH24QE-K6DNC8J-I
<b>Performance</b>							
Cooling Capacity	kW	2.5	3.5	4.6	5.2	6.1	7.2
Heating Capacity	kW	3.2	3.8	4.7	5.8	7.3	8.1
Dehumidifying Volume	l/s	0.8	1.4	1.8	1.8	2	2.5
Air flow	m <sup>3</sup> / h	231	264	264	347	403	361
Sound Pressure	dB (A)	19 / 43	19 / 43	27 / 47	29 / 48	29 / 52	29 / 48
Sound Power	dB (A)	29 / 53	29 / 53	37 / 58	39 / 58	39 / 62	39 / 58
Indoor T ° set-point range	°C	+16~+30	+16~+30	+16~+30	+16~+30	+16~+30	+16~+30
<b>Electrical</b>							
Power Supply (From Outdoor)	V/P/Hz	220~240 / 1 / 50					
Power / Communication Cable	m	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E
<b>Dimensions and Weights</b>							
Product Length / Height / Depth	mm	798x295x222	798x295x222	970x300x224	1078x325x246	1078x325x246	1078x325x246
Net / gross weight	kg	10	10.5	13.5	15.5	15.5	16
<b>Installation</b>							
Refrigeration connections	Liquid	6.35 (1 / 4")	6.35 (1 / 4")	6.35 (1 / 4")	6.35 (1 / 4")	6.35 (1 / 4")	6.35 (1 / 4")
	Gas	9.52 (3 / 8")	9.52 (3 / 8")	12.7 (1 / 2")	15.88 (5 / 8")	15.88 (5 / 8")	15.88 (5 / 8")
Drain Connection	mm	16	16	16	16	16	16

# Pular Free Match Hi-wall Indoor Units



XK76 (Optional)




YAP1F7 (WiFi)

The Gree Pular range of hi-wall indoor units brings a sleek contemporary look to your home. The Pular indoors feature Gree's latest technology, reliability and performance.



## Pular Features

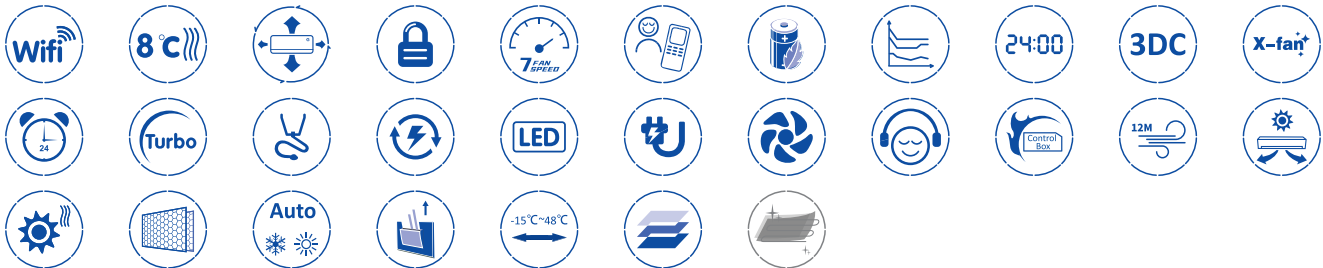

Series		Pular					
Realcold Part No.		AC7321	AC7322	AC7323	AC7325	AC7326	AC7327
Indoor Model No.		GWH07AGAXB -K6DNA1A/I	GWH09AGCXB -K6DNA1A/I	GWH12AGCXD -K6DNA1A/I	GWH18AGDXE -K6DNA1A/I	GWH21AGEXF -K6DNA1A/I	GWH24AGEXF -K6DNA1A/I
<b>Performance</b>							
Cooling Capacity	kW	2.25	2.65	3.52	5.0	6.4	7.1
Heating Capacity	kW	2.7	3.2	4.0	6.0	7.4	8.0
Dehumidifying Volume	l/s	0.6	0.8	1.4	1.8	2.5	2.4
Air Flow Volume (Max)	m <sup>3</sup> / h	144	205	200	291	361	361
Sound Pressure (Min/Max) Ind	dB (A)	22 ~ 39	20 ~ 42	24 ~ 44	27 ~ 46	29 ~ 49	32 ~ 50
Sound Power (Min/Max) Ind	dB (A)	38 ~ 55	35 ~ 57	39 ~ 59	43 ~ 62	41 ~ 62	48 ~ 66
<b>Electrical</b>							
Power Supply (From Outdoor)	V/P/Hz	220~240 / 50 / 1					
Control Wiring	m	3 x 1.5 + E (4 cores)					
<b>Dimensions and Weights</b>							
Indoor Dimensions (WxHxD)	mm	704 x 260 x 185	825 x 293 x 196	825 x 293 x 196	982 x 311 x 221	1075 x 333 x 246	1075 x 333 x 246
Indoor Net Weight	kg	7.5	9.5	9.5	13	16	16
<b>Installation</b>							
Pipe Connections mm (in)	Liquid	6.35 (1 / 4")	6.35 (1 / 4")	6.35 (1 / 4")	6.35 (1 / 4")	6.35 (1 / 4")	6.35 (1 / 4")
	Gas	9.52 (3 / 8")	9.52 (3 / 8")	9.52 (3 / 8")	12.7 (1 / 2")	12.7 (1 / 2")	15.88 (5 / 8")
Drain Connection	mm	16	16	16	16	16	16

# Mini Floor Console Free Match Indoor Units



XK76 (Optional)




YAG1F

The Gree floor console unit offers an alternate to the hi-wall style indoor units. The console can supply hot air from two discharge grilles providing the ultimate in heating comfort.



## Mini Floor Console Features

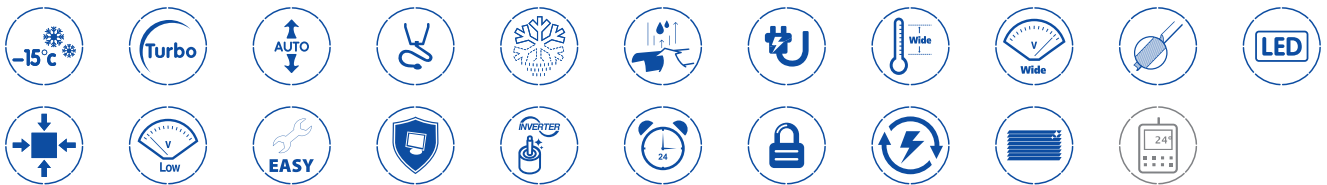

Series		Mini Floor Mount
Reacold Part No.		AC7423-I
Indoor Model No.		GEH18AA-K6DNA1F-I
<b>Performance</b>		
Cooling Capacity	kW	5.2
Heating Capacity	kW	5.3
Dehumidifying Volume	l/s	1.8
Air flow	m <sup>3</sup> / h	194~89
Sound Pressure	dB (A)	47~31
Sound Power	dB (A)	57~41
Indoor T ° set-point range	°C	+16~+30
<b>Electrical</b>		
Power Supply (From Outdoor)	V/P/Hz	220~240 / 1 / 50
Power / Communication Cable	m	3 x 1.5 + E
<b>Dimensions and Weights</b>		
Product Length / Height / Depth	mm	700x600x315
Net / gross weight	kg	15.5
<b>Installation</b>		
Refrigeration connections	Liquid	6.35 (1 / 4")
	Gas	12.7 (1 / 2")
Drain Connection	mm	16



# Bulkhead Free Match Ducted Indoor Units




XK46

The Gree slim duct range of indoor units offers the ultimate in flexibility and discretion. Hidden from view in ceiling spaces these units are designed to supply conditioned air via a ceiling or wall diffuser.



(Optional)

## Bulkhead Features

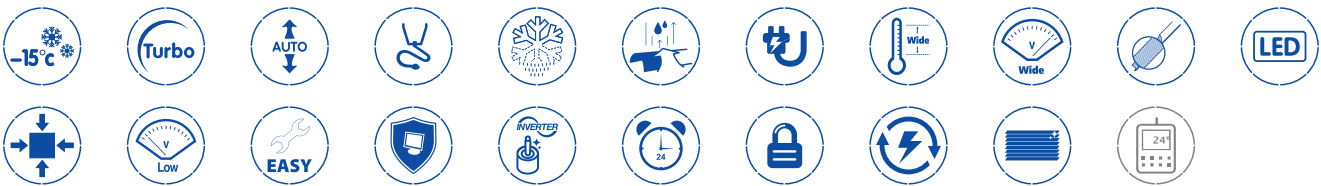

Series		Bulkhead Ducted				
Realcold Part No.						
Indoor Model No.		GFH(09)EA-K6DNA1B/I	GFH(12)EA-K6DNA1B/I	GFH(18)EA-K6DNA1B/I	GFH(21)EA-K6DNA1B/I	GFH(24)EA-K6DNA1B/I
Performance						
Cooling Capacity	kW	2.5	3.5	5	6	7.1
Heating Capacity	kW	2.8	3.85	5.5	6.6	8
Dehumidifying Volume	l/s	-	-	-	-	-
Air flow	m <sup>3</sup> / h	450	550	700	1000	1000
Static Pressure	Pa	5	5	5	5	5
Sound Pressure	dB (A)	31~37	32~39	33~41	34~42	34~42
Sound Power	dB (A)	41~47	42~49	43~51	44~52	44~52
Indoor T ° set-point range	°C	+16~+30	+16~+30	+16~+30	+16~+30	+16~+30
Electrical						
Power Supply (From Outdoor)	V/P/Hz	220~240 / 1 / 50				
Power / Communication Cable	m	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E
Dimensions and Weights						
Product Length / Height / Depth	mm	700x200x615	700x200x615	900x200x615	1100x200x615	1100x200x615
Net / gross weight	kg	21	22	26	30	30
Installation						
Refrigeration connections	Liquid	6.35 (1 / 4")	6.35 (1 / 4")	6.35 (1 / 4")	9.52 (3 / 8")	9.52 (3 / 8")
	Gas	9.52 (3 / 8")	9.52 (3 / 8")	12.7 (1 / 2")	15.88 (5 / 8")	15.88 (5 / 8")
Drain Connection	mm	-	-	-	-	-

# Compact 360 Cassette Free Match Indoor Units



XK76 (Optional)




YAG1F

The Gree cassette range of indoor units offers a compact design for easy installation. A strong and balanced airflow, with advanced protection functions and an intelligent drainage device.



(Optional)

## Cassette Features

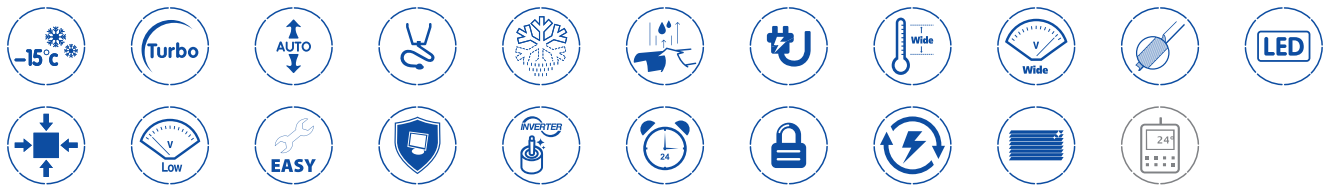

Series		Cassette		
Realcold Part No.				
Indoor Model No.		GKH(12)BB-K6DNA3A/I	GKH(18)BB-K6DNA3A/I	GKH(24)BC-K6DNA4A/I
<b>Performance</b>				
Cooling Capacity	kW	3.5	4.5	7.1
Heating Capacity	kW	4	5	8
Dehumidifying Volume	l/s	-	-	-
Air flow	m <sup>3</sup> / h	650	710	1280
Sound Pressure	dB (A)	34~44	35~47	36~47
Sound Power	dB (A)	45~55	46~58	47~58
Indoor T ° set-point range	°C	+16~+30	+16~+30	+16~+30
<b>Electrical</b>				
Power Supply (From Outdoor)	V/P/Hz	220~240 / 1 / 50		
Power / Communication Cable	m	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E
<b>Dimensions and Weights</b>				
Product Length / height / width	mm	596x240x596	596x240x596	840x240x840
Net / gross weight	kg	20	20	26
Façade	mm	763x105x763	763x105x763	1033x133x1033
Weight	kg	3.5	3.5	7
<b>Installation</b>				
Refrigeration connections	Liquid	6.35 (1 / 4")	6.35 (1 / 4")	9.52 (3 / 8")
	Gas	9.52 (3 / 8")	12.7 (1 / 2")	15.88 (5 / 8")
Drain Connection	mm	-	-	-

# Free Match Outdoor Units



## Gree Free Match Outdoor Units

- Four different models to choose from
- Connectable from 2 to 4 units
- Wide temperature operation range
- Wide voltage operation range
- Auto restart
- Gree G10 180° Sine Wave Inverter
- Blue Fin / Gold Fin / Black Fin depending on the model

## Outdoor Units Features





# Free Match Outdoor Units



The Gree Free Match R32 multi split series is ideal for residential building and offices, since it allows the installation of up to 4 indoor units, i.e. up to 53 possible combinations with wall splits, cassettes, ducts and consoles to a single outdoor unit.

There are four different outdoor units to choose from, giving even more flexibility in finding the perfect system for your requirements.

Gree Free Match outdoors utilises the company's G10 Inverter technology. The G10 Inverter uses highly sensitive control technology to vary the speed of the air conditioner according to the required set point. When the desired temperature is reached, the G10 Inverter technology guarantees its continuous maintenance while achieving greater energy efficiency.

Gree G10 Inverter has 180° Sine Wave DC Variable Speed technology and this provides more precise control. By producing a smoother sine wave, the G10 Inverter allows for step less regulation of the operating frequency, this means the compressor is less strained, resulting in greater reliability while providing lower sound levels.

The G10 Inverter offers ultra-low power consumption standby mode. The Free Match outdoors use less than 1 watt in standby mode.

Reflecting the varied climate of our nation, the Gree Free match units can operate in cooling from -15°C to 43°C and in heating form -15°C to 24°C .

The Free Match system can operate safely between 160V and 276V, which means voltage variations, are less likely to cause damage. In the case of a power outage, the Gree Free Match will automatically restart with the same mode and settings as before the shutdown.

Our coastal environments can be harsh on outdoor units. To help ward off the challenges the outdoor coils have gold hydrophilic fin coating to assist defrost and to improve corrosion resistance. The chassis is made of zinc coated steel and painted for added resistance and the PCB's have three coats of AUS Guard to offer better moisture protection.

Gree Free Match units come standard with R32 ecological refrigerant, auto defrosts and self-diagnosis program in case it goes wrong. This is all back by Gree's amazing 6-Year parts and labour warranty.



# Outdoor Units Specification

Outdoor Model No.		GWHD(18)NK6KO	GWHD(24)NK6KO	GWHD(28)NK6KO	GWHD(36)NK6KO
Multi Split System	In/Out	2 x 1	3 x 1	4 x 1	4 x 1
<b>Performance</b>					
Cooling Capacity	kW	5.2	7.1 (2.3~8.5)	8	10.5
Heating Capacity	kW	5.4	8.5 (3.7 ~ 8.8)	9.3	11
Heating Capacity H2	kW	4.6	6.1	7	8.2
Power Input	Cold (W)	1.45	1.95	2.3	3.1
	Hot (W)	1.3	2.2	2.65	3.2
AEER / ACOP	W/W	-	-	-	-
SEER Label Stars, Hot/Ave/Cold	Cool	-	-	-	-
	Heat	-	-	-	-
Air flow	(m <sup>3</sup> / h)	2600	4000	4000	7200
Sound Pressure	(dB (A))	55	58	58	60
Sound Power	(dB (A))	65	68	68	70
Indoor T ° set-point range	°C	+16~+30	+16~+30	+16~+30	+16~+30
Operating range in outdoor T °	Cold (°C)	-15~+43	-15~+43	-15~+43	-15~+43
	Hot (°C)	-15~+24	-15~+24	-15~+24	-15~+24
<b>Electrical</b>					
Power Supply (Outdoor)	(V / P / Hz)	220~240 / 1 / 50			
Recommended Circuit Breaker	A	16	25	-	-
Current Draw	Cold (A)	6.43	8.65	10.2	14
	Hot (A)	5.77	9.76	11.76	13
Communication Cable	(m)	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E	3 x 1.5 + E
Power cable	(n ° x s)	2 x 2.5 + E	2 x 2.5 + E	2 x 2.5 + E	2 x 2.5 + E
<b>Dimensions and Weights</b>					
Product Length / height / width	(mm)	899 / 596 / 378	980 / 790 / 427	980 / 790 / 427	1088 / 1103 / 440
Packing Length / height / width	(mm)	948 / 645 / 420	1083 / 855 / 488	1083 / 855 / 488	1158 / 1235 / 493
Net / gross weight	(kg)	43 / 46	68 / 73	69 / 74	94 / 98
<b>Installation</b>					
Refrigeration connections	Liquid	2 x 6.35 (1/4")	3 x 6.35 (1/4")	4 x 6.35 (1/4")	4 x 6.35 (1/4")
	Gas	2 x 9.52 (3/8")	3 x 9.52 (3/8")	4 x 9.52 (3/8")	4 x 9.52 (3/8")
Refrigerant Charge R32	(kg)	1.05	1.8	2	2.75
Pre-charged Pipe Length	(m)	10	30	40	40
Additional Charge per Metre	(g / m)	20	20	20	20
Maximum length indoor unit	(m)	10	20	20	25
Maximum total length (UI / EU)	(m)	20	60	70	75
Maximum height difference	(m)	5	10	10	15

# Unit Combinations

## Line Up

Model	7 (2.25)	9 (2.5)	12 (3.5)	15 (4.6)	18 (5.2)	21 (6.1)	24 (7.1)
Hyper		•	•	•	•	•	•
Pular	•	•	•		•	•	•
Bulkhead		•	•		•	•	•
Cassette			•		•		•
Mini Floor					•		

## Gree Free Match R32 Connection Combinations

The allowance for indoor connections is very flexible, but there are some recommendations to follow. The allowable connections for any outdoor unit are based on a minimum of 50% cooling capacity up to a maximum of 150% cooling capacity. However, please be aware that certain connections, while within the design parameters may produce undesirable performance. For that reason we do not recommend using an indoor unit rated at the same capacity as the outdoor unit e.g. an 18 indoor with an 18 outdoor. Or using a 21 or 24 indoor unit on a 24 or 28 outdoor unit.

8 Combinations



FM18 2 Units	
7 + 7	9 + 9
7 + 9	9 + 12
7 + 12	9 + 15
7 + 15	12 + 12

33 Combinations



FM24			
2 Units		3 Units	
7 + 7	12 + 12	7 + 7 + 7	7 + 12 + 12
7 + 9	12 + 15	7 + 7 + 9	7 + 12 + 15
7 + 12	12 + 18	7 + 7 + 12	9 + 9 + 9
7 + 15	15 + 15	7 + 7 + 15	9 + 9 + 12
7 + 18	15 + 18	7 + 7 + 18	9 + 9 + 15
9 + 9	18 + 18	7 + 9 + 9	9 + 9 + 18
9 + 12		7 + 9 + 12	9 + 12 + 12
9 + 15		7 + 9 + 15	9 + 12 + 15
9 + 18		7 + 9 + 18	12 + 12 + 12

56 Combinations



FM28					
2 Units		3 Units		4 Units	
7 + 7	12 + 18	7 + 7 + 7	7 + 12 + 18	7 + 7 + 7 + 7	7 + 9 + 9 + 9
7 + 9	15 + 15	7 + 7 + 9	9 + 9 + 9	7 + 7 + 7 + 9	7 + 9 + 9 + 12
7 + 12	15 + 18	7 + 7 + 12	9 + 9 + 12	7 + 7 + 7 + 12	7 + 9 + 9 + 15
7 + 15	18 + 18	7 + 7 + 15	9 + 9 + 15	7 + 7 + 7 + 15	7 + 9 + 12 + 12
7 + 18		7 + 7 + 18	9 + 9 + 18	7 + 7 + 7 + 18	9 + 9 + 9 + 9
9 + 9		7 + 9 + 9	9 + 12 + 12	7 + 7 + 9 + 9	9 + 9 + 9 + 12
9 + 12		7 + 9 + 12	9 + 12 + 15	7 + 7 + 9 + 12	9 + 9 + 9 + 15
9 + 15		7 + 9 + 15	9 + 12 + 18	7 + 7 + 9 + 15	9 + 9 + 12 + 12
9 + 18		7 + 9 + 18	12 + 12 + 12	7 + 7 + 9 + 18	
12 + 12		7 + 12 + 12	12 + 12 + 15	7 + 7 + 12 + 12	
12 + 15		7 + 12 + 15	12 + 12 + 18	7 + 7 + 12 + 15	

155 Combinations






FM36							
2 Units		3 Units			4 Units		
7 + 12	21 + 24	7 + 7 + 7	9 + 9 + 9	12 + 12 + 21	7 + 7 + 7 + 7	7 + 7 + 18 + 21	9 + 9 + 9 + 15
7 + 15	24 + 24	7 + 7 + 9	9 + 9 + 12	12 + 12 + 24	7 + 7 + 7 + 9	7 + 9 + 9 + 9	9 + 9 + 9 + 18
7 + 18		7 + 7 + 12	9 + 9 + 15	12 + 15 + 15	7 + 7 + 7 + 12	7 + 9 + 9 + 12	9 + 9 + 9 + 21
7 + 21		7 + 7 + 15	9 + 9 + 18	12 + 15 + 18	7 + 7 + 7 + 15	7 + 9 + 9 + 15	9 + 9 + 9 + 24
7 + 24		7 + 7 + 18	9 + 9 + 21	12 + 15 + 21	7 + 7 + 7 + 18	7 + 9 + 9 + 18	9 + 9 + 12 + 12
9 + 9		7 + 7 + 21	9 + 9 + 24	12 + 15 + 24	7 + 7 + 7 + 21	7 + 9 + 9 + 21	9 + 9 + 12 + 15
9 + 12		7 + 7 + 24	9 + 12 + 12	12 + 18 + 18	7 + 7 + 7 + 24	7 + 9 + 9 + 24	9 + 9 + 12 + 18
9 + 15		7 + 9 + 9	9 + 12 + 15	12 + 18 + 21	7 + 7 + 9 + 9	7 + 9 + 12 + 12	9 + 9 + 12 + 21
9 + 18		7 + 9 + 12	9 + 12 + 18	12 + 18 + 24	7 + 7 + 9 + 12	7 + 9 + 12 + 15	9 + 9 + 12 + 24
9 + 21		7 + 9 + 15	9 + 12 + 21	12 + 21 + 21	7 + 7 + 9 + 15	7 + 9 + 12 + 18	9 + 9 + 15 + 15
9 + 24		7 + 9 + 18	9 + 12 + 24	15 + 15 + 15	7 + 7 + 9 + 18	7 + 9 + 12 + 21	9 + 9 + 15 + 18
12 + 12		7 + 9 + 21	9 + 15 + 15	15 + 15 + 18	7 + 7 + 9 + 21	7 + 9 + 12 + 24	9 + 9 + 15 + 21
12 + 15		7 + 9 + 24	9 + 15 + 18	15 + 15 + 21	7 + 7 + 9 + 24	7 + 9 + 15 + 15	9 + 9 + 18 + 18
12 + 18		7 + 12 + 12	9 + 15 + 21	15 + 15 + 24	7 + 7 + 12 + 12	7 + 9 + 15 + 18	9 + 12 + 12 + 12
12 + 21		7 + 12 + 15	9 + 15 + 24	18 + 18 + 18	7 + 7 + 12 + 15	7 + 9 + 15 + 21	9 + 12 + 12 + 15
12 + 24		7 + 12 + 18	9 + 18 + 18		7 + 7 + 12 + 18	7 + 9 + 18 + 18	9 + 12 + 12 + 18
15 + 18		7 + 12 + 21	9 + 18 + 21		7 + 7 + 12 + 21	7 + 12 + 12 + 12	9 + 12 + 12 + 21
15 + 21		7 + 12 + 24	9 + 18 + 24		7 + 7 + 12 + 24	7 + 12 + 12 + 15	9 + 12 + 15 + 15
15 + 24		7 + 18 + 18	9 + 21 + 21		7 + 7 + 15 + 15	7 + 12 + 12 + 18	9 + 12 + 15 + 18
18 + 18		7 + 18 + 21	9 + 21 + 24		7 + 7 + 15 + 18	7 + 12 + 12 + 21	12 + 12 + 12 + 12
18 + 21		7 + 18 + 24	12 + 12 + 12		7 + 7 + 15 + 21	7 + 15 + 15 + 15	12 + 12 + 12 + 15
18 + 24		7 + 21 + 21	12 + 12 + 15		7 + 7 + 15 + 24	9 + 9 + 9 + 9	12 + 12 + 12 + 18
21 + 21		7 + 21 + 24	12 + 12 + 18		7 + 7 + 18 + 18	9 + 9 + 9 + 12	12 + 12 + 15 + 15

# Installation

## Installation

- Each unit has its own set of pipework, so no brazing required
- Just like a standard hi-wall the interconnecting wiring is very simple.
- Compact design
- Wide temperature operation
- Single outdoor
- Capacity Redundancy of 150%

## Installation Diagrams

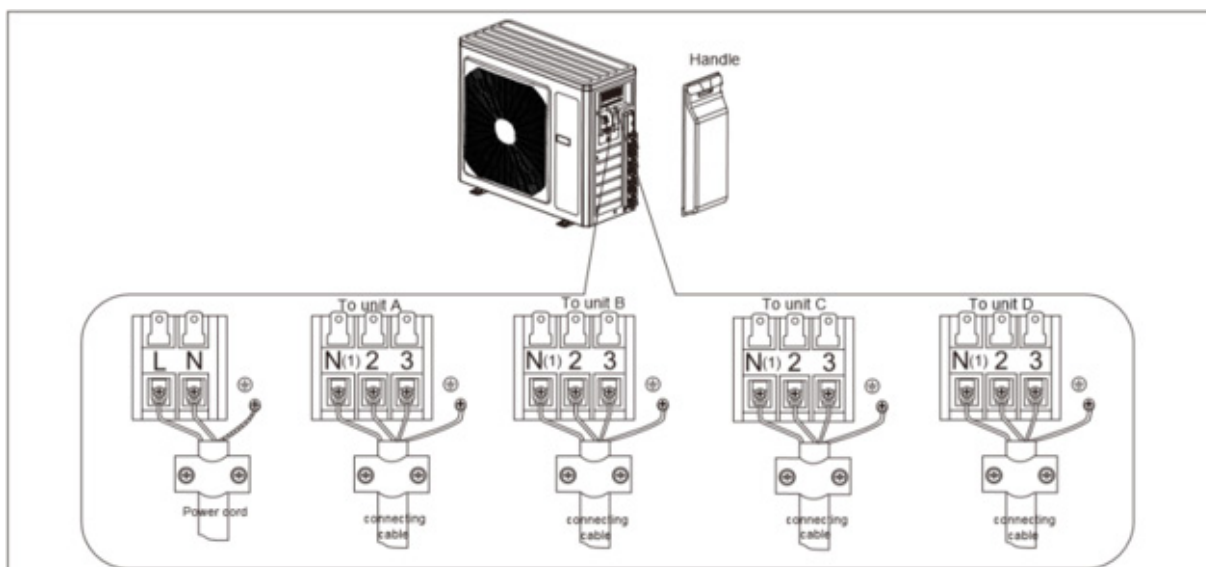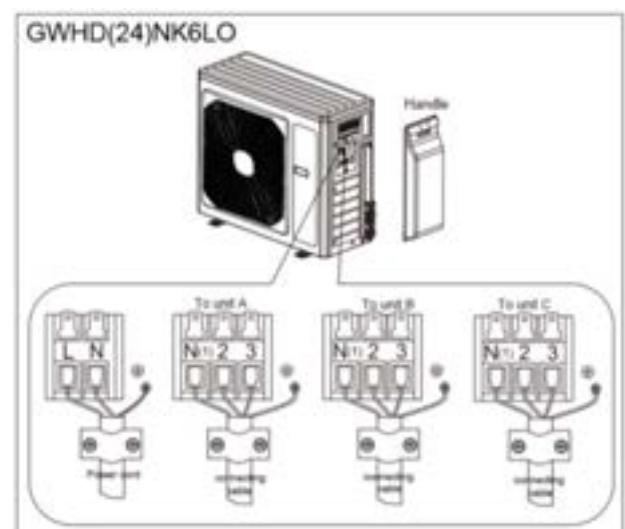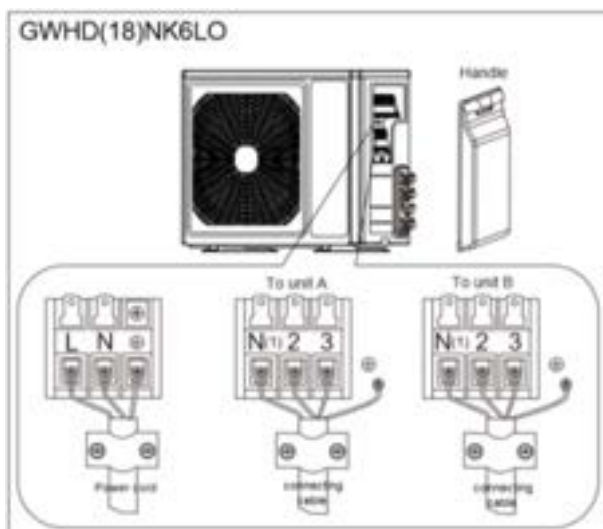

For Installation and Sales:



For Parts and Warranty:

The logo for GREE Air Conditioner, featuring a stylized 'G' icon in blue and orange to the left of the word 'GREE' in a bold, blue, sans-serif font. Below 'GREE' is the text 'AIR CONDITIONER' in a smaller, blue, sans-serif font. At the bottom left of the box is the website 'www.greeac.com.au' in blue. At the bottom right is the phone number '1800 GREE 4 ME' in orange, with '1800 4733 4 63' in orange below it.

**GREE**  
AIR CONDITIONER

[www.greeac.com.au](http://www.greeac.com.au) **1800 GREE 4 ME**  
1800 4733 4 63