



# Silent+ Mini White

## **CONDENSATE REMOVAL PUMP**

Incredibly quiet, easy to install and maintain, the Silent<sup>+</sup> Mini White has been designed to fit either side of the evaporator unit. A double insulated reservoir eliminates condensation and is simple to unclip for cleaning and maintenance.



45L/h max. flow



10m max. rec. head (flow rate 23L/h)




As low as 16dB(A) when operating





- Ultra quiet operation
- Extra quick to fit
- Compact & discreet
- Removable reservoir

# **SUITABILITY**

- Up to 16kW / 54,000Btu/h
- High wall mini split systems
- ✓ Perfect for... domestic environments where minimising audible noise is crucially important

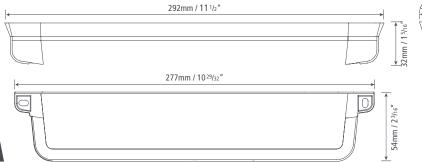








SILENT <sup>+</sup> MINI WHITE @ 230 VAC 50Hz					
Max. flow	45L/h @ 0m head				
Max. rec. head	10m				
Min. dB(A) @ 1m	16				
Power supply	230 VAC, 0.18A, 2.1W 50/60Hz				
Rated	Continuous				
Class	II appliance 🗌				
Max. unit output	16kW / 54,000Btu/h				
Max. ambient temperature	40°C / 104°F				
IP Protection	IP24				
Inlet o/d	16mm (5/8") – 26mm (1")				
Outlet o/d	Ø6mm / 1/4"				
Safety switch	5.0 A NO & NC contacts				

Ensure ALL cleaning chemicals are flushed out of the reservoir after use





10 5								
0	2	4 METRE	6 S HEAD	8	10			
SUGGESTED XTRA ACCESSORIES								
Descript	ion			Part N	0.			
1 Amp F	use			FP2620	)			



Tube To Soil Stack Adaptor

## IN THE BOX

Silent<sup>+</sup> Mini White pump (incl. hard wired 1m power cable) • Fitting template • Outlet elbow • Screw caps • Spacer • Installation manual

Download manual at aspenpumps.com

# SILENT<sup>+</sup> MINI WHITE OPTIONS

Silent+ Mini White (Europe) FP3450

For more installation accessories take

nformation correct at time of going to press

Thermal protection

Self priming