Site Supervisor for small format

Complete facility control made simple



For small format retailers, providing fresh, quality food while maintaining a convenient shopping experience for their customers is a constant challenge. It means keeping close watch over every store system and piece of equipment impacting that experience — from refrigeration and lighting to heating and cooling.

Enter Site Supervisor, a flexible facility control platform that simplifies this while giving retailers better control over their key store systems. As part of Emerson's facility controls family, the new Site Supervisor manages refrigeration, HVAC, lighting and other critical equipment and systems. It also collects data on important performance indicators, including refrigeration temperatures, energy usage and HVAC discharge and space temperatures, so store managers can quickly respond to issues that may impact the customer experience and food safety.

While powerful and feature-rich, Site Supervisor is still easy enough to use at the local levels. Site Supervisor gives store managers and service technicians enterprise-level visibility to systems and equipment through a simple, intuitive interface. Optimized for small format stores, the local manager-friendly user interface makes it easy to determine current conditions. When needed, authorized users can override key functions like lighting 'on' temporarily and effortlessly.

Site Supervisor is optimized for use with Site Manager 17.2 and can also seamlessly connect to Emerson's ProAct™ Services to diagnose alarms, resolve problems, and maintain systems.


Benefits

- Intuitive Navigation: Easy to use with no special training for day-to-day operation. Familiar processes, icon-based navigation, and common tool bars on wall-mounted, desktop or mobile device.
- Priority Actions: Highlights the information needed for action and resolution. Priority alerts are visible in red for easy recognition, visibility and action.
- Fast Response: Managers and servicers can act quickly, with detailed information available instantly in convenient drill-down screens
- Mobile Optimized: Access and operate from anywhere.
 In addition to wall-mounted and desktop control, authorized user can access on phone or tablet.
- **Secure Data:** Options to manage locally, on your network or through the Emerson cloud.

Features

- HVAC and lighting control
- Refrigeration monitoring and control
- Remote access to store data via standard web browser
- Automated alerts via SMS/email
- Data logs and equipment performance information
- Simple, easy-to-use user interface



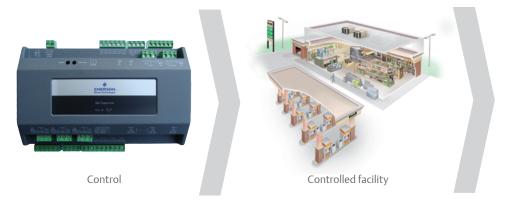

		• * "
Refigeration		
THICKNOWN	SIDARIY CASE	10ACCIPIMAT
26.50 T -12.00 T	36.51 7 34.00 7	26.50 T 26.00 T
4 8 9 9	A * S S	4 4 9 9
49REPLANCE	SPROJEN POOD	EMPARAGE
36.61 " 33.96 "	25.87 " -10.00 "	35.88 * 40.00 *
4 * 0 0	4 0 0 0	4 * 0 0
Name of Street		
ARUT	MELT .	A4U3
71.50 * 74.00 *	71.50 " 74.00 "	71.50 T 74.00 T
A 8	A S	
ANUE	ME 5	HAC Zew Doorto
71.50 74.00	71.50 " 74.00 "	70.87 " NONE "
	A 0	

Facility insight

Site Supervisor small format control capabilities


HVAC	up to 8 network thermostats up to 6 AHUs
Lighting	up to 6 lighting circuits
Energy Control	1 demand control application
Energy monitoring	up to 8 Emerson energy meters
Refrigeration monitoring	up to 16 AI boards
Refrigeration control (optional)	up to 6 standard circuits up to 32 XR35/75

The next generation of facility controls

Site Supervisor is the next generation of facility controls that deliver energy management with the ability to monitor various facility systems and provides alerts when there are issues that need attention. The Site Supervisor control module provides HVAC control, refrigeration system monitoring and control, as well as lighting control.

Specifications

Mounting	DIN rail
Inputs	8 analog/4 digital
Relay outputs	4 outputs
Ethernet ports	3 ports, 1,1,0
USB ports	2 ports, 1,2
Micro SD	1
Access	Onboard web server
Control network	4 Modbus RS48S ports
User access	Local and remote
Power requirement	24VAC 20VA required
Operating temperature	-40°F to 149°F (-40°C to 65°C)
Relative humidity	20-85% RH non-condensing
Dimensions	103.7 x 34.7 mm
Enclosure rating	UL 94 V-0

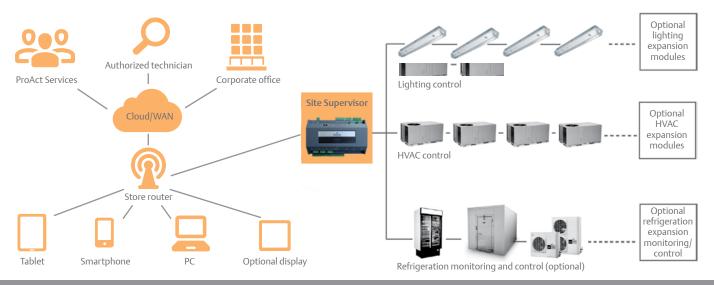

Site Supervisor connects with a number of 3rd party devices. For a complete list of these devices please visit Emerson.com/RetailSolutions

 $2014 RS - 36\,R4\,(4/18)\ \ Emerson\ is\ a\ trademark\ of\ Emerson\ Electric\ Co.\ \\ \mathbb{O}2018\ Emerson\ Climate\ Technologies,\ Inc.\ All\ rights\ reserved.$

Emerson.com/RetailSolutions