




SPECIFICATION 规格说明

MOTOR 电机型式	YGF Series Cross Flow Motors YGF 贯流风机
MOTOR TYPE 电机型号	YGF60-300
VOLTAGE 额定电压 (V)	220
FREQUENCY 频率 (Hz)	50
INPUT POWER 输入功率 (W)	28
CURRENT 电流 (A)	0.23
SPEED 负载转速 (r/min)	2100±150
FAN BLADES 负载风叶	Φ60-300
ROTATION 旋转方向	CW (looking towards the shaft 从轴伸端视去顺时针方向)
AIRFLOW DIRECTION 风向	Blowing (沿出口风口平行吹出)
MOTOR PROTECTION 电机保护方式	Impedance protection 阻抗保护
INSULATION CLASS 绝缘等级	Class B B级绝缘
TEMPERATURE RISE 温升	95K max (with load) 负载温升不超过95K
PROTECTION CLASS 防护等级	/
OPERATING TYPE 工作定额	S1 连续工作制
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
AMBIENT TEMPERATURE 适用环境温度	-25°C ~ +50°C
BEARINGS 轴承型式	Sleeve bearings 含油轴承
ELECTRICAL CONNECTION 电源线	RV-90 2C 0.75mm ² lead wire 460-500mm free length 电源线长460-500mm. 型号: RV-90 2C 0.75mm ²
HI-POT TEST 耐压测试	1800V/1s I _{leakage} ≤ 0.7mA 1800V历时1秒, 泄漏电流 ≤ 0.7mA
WEIGHT PER UNIT 单个电机净重	1.5kg
PACKING 包装	25PCS/CTN 25台/箱

Wiring diagram 接线图

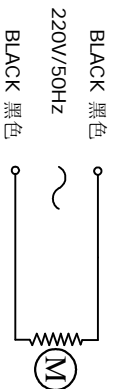

Label 铭牌

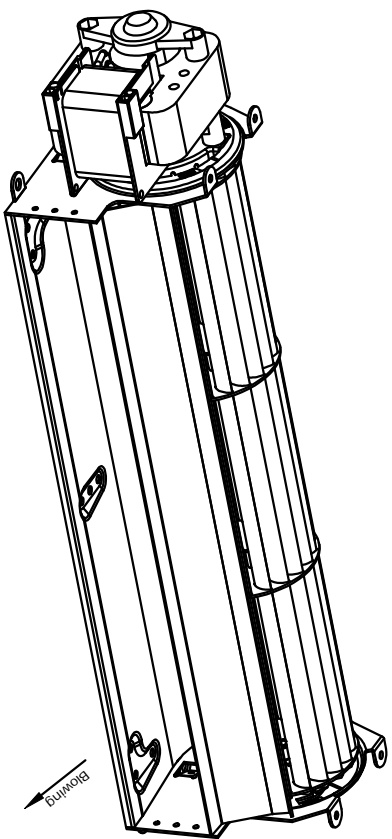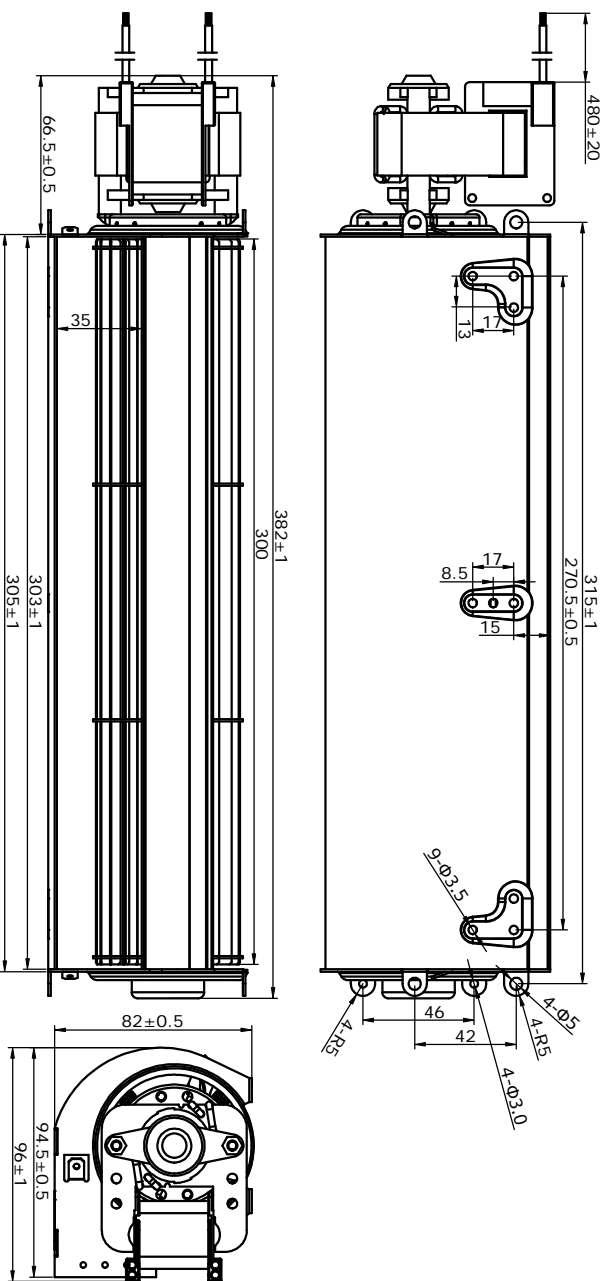

REV.	DESCRIPTION	APPROVED	DATE	ANGLE	DECIMAL	TOLERANCE
					X	±0.5
					X.X	±0.25
				X.XX		±0.15
						±3°
TITLE						
YGF60-300-L						
PROJECTION						
A4						
SCALE:						
SHEET: 1 of						