

Silent⁺ Mini Aqua[®]



CONDENSATE REMOVAL PUMP

The Silent⁺ Mini Aqua keeps its sleek and slender form offering unparalleled installation flexibility. It fits neatly into trunking and inside mini split units. Packed with our proven 5th Gen Technology, it's unbeatable silence – a barely audible 16dB(A)*, combined with intelligent, adaptive flow rates – further extends pump life, maximises reliability and improves energy efficiency. Quietly brilliant.



35L/h max. flow





10m max. rec. head




As low as 16dB(A)*

0.408 kg

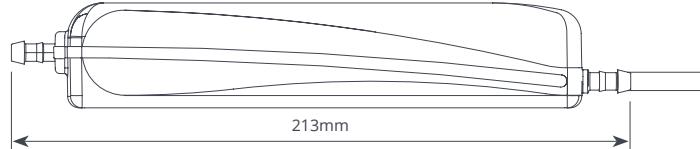


Suitability

- Up to 40kW / 136,000Btu/h
- Ducted units; floor standing & chassis units; high wall mini split systems
- Perfect for...** smaller commercial and domestic applications, where silence is needed

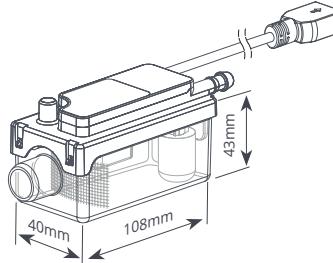

SPECIFICATIONS

Max. flow	35L/h @ 0m head
Max. rec. head	10m
Max. suction lift	1.5m
Min. dB(A) @ 1m	16dB(A)*
Power supply	100-250VAC, 0.18A, 2.4W, 50/60 Hz
Rated	Continuous
Class	II <input checked="" type="checkbox"/>
Max. unit output	40kW (136,000Btu/h)
Max. ambient temp	40°C (104°F)
IP Protection	IP24
Inlet o/d	Ø16mm (5/8")
Outlet o/d	Ø6mm (1/4")
Safety switch	5.0 A Normally closed
Self priming	✓

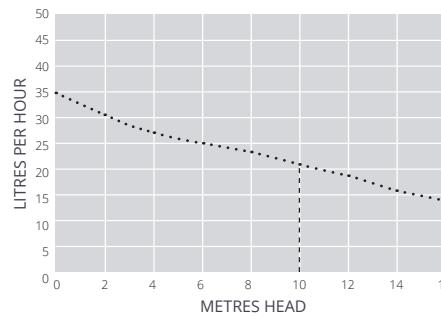

Silent ⁺ Mini Aqua (5th Gen, Europe)	FP3420
---	--------

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Hose Clamp 10.1 dia. (x10)	B3340
S ⁺ Mini Pump spare filters (x10)	FP3330
Barbed anti-siphon device	FP3336/1
Reservoir copper mesh filter (x10)	FP3460

 Visit aspenpumps.com for more installation accessories.

* Assuming solid wall construction with a 2kW unit

** Not backwards compatible



**ASPEN
PUMPS**
ASIA PACIFIC