

# Peri Pro Air

## CONDENSATE REMOVAL PUMP

The new Peri Pro Air offers outstanding reliability with an industry first 5 year warranty\*. Built upon stepper motor technology and software control, this version offers user programmable speed control to minimise audible noise and tube wear.



15L/h max. flow



12m max. head  
(flow rate 15L/h)






1.12  
kg

### KEY FEATURES

- 5 year warranty\*
- Configurable motor speed
- Flexible installation with outstanding lift
- Easy to install with Patented mounting technology
- Temperature sensor triggering switch
- Low operational noise


### SUITABILITY

- High wall split systems; Ducted units; Floor standing & Chassis units
  - Up to 20kW / 68,000Btu/h
- ✓ **Perfect for...** hotel bedrooms and other remote install locations

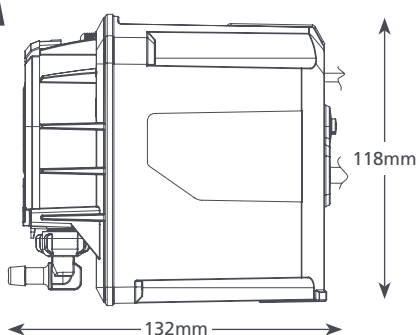

### PERI PRO AIR @ 110-230 VAC 50/60Hz

Max. flow	15L/h @ 12m head
Max. head	12m
Max. suction lift	3m
dB(A) @ 1m	21
Power supply	110-230 VAC, 0.2A, 50/60Hz
Rated	Continuously
Class	II appliance
Max. unit output	20kW / 68,000 Btu/h
Max. ambient temperature	40°C / 104°F
Inlet/outlet	6mm ID
IP Protection	IP24
Safety switch	5A NC relay
Self priming	✓

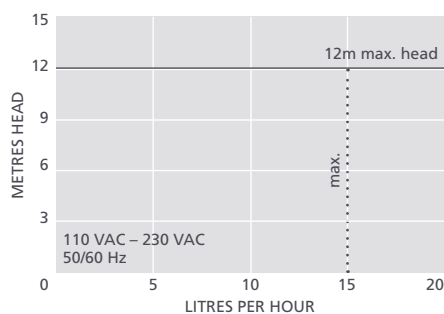

### OPTIONS

Peri Pro Air

FP3390

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
Peri Spare Tube Kit	FP3394
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038



For more installation accessories take a look at our Aspen Xtra range

### IN THE BOX

Peristaltic pump • 3m Plug & play power / sensor cable • Wall mounted bracket  
• Fixing kit • Installation manual

Download manual at [aspenpumps.com](https://www.aspenpumps.com)

\* excludes tube and subject to correct installation and operation