




T-Type Branch Joint

**ST**

**T-TYPE JOINT**

Material...P.V.C.

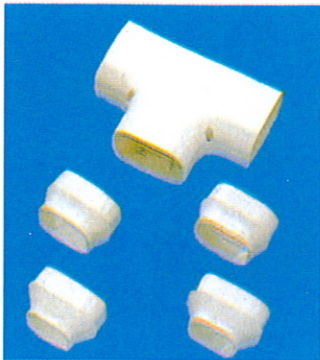

(Unit : mm)

Code No.	Product No.	A	B	C	D	E	Pcs/Pkg
0462	<b>ST-77</b>	85	68	165	124	31	10
0461	<b>ST-100</b>	109	78	200	154	33	10
0463	<b>ST-140</b>	148	87	250	199	32	5




ST-77 supplied with 2 pcs. of ST-77-66 (for SD-66)  
 ST-100 supplied with 2pcs. of ST-100-66 (for SD-66)  
 and 2pcs. of ST-100-77 (for SD-77)  
 ST-140 supplied with 2pcs. of ST-140-100 (for SD-100)

Duct End Treatment

**SE/SEN**

**END COVER**

Material...P.V.C.

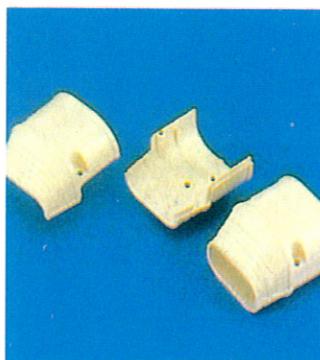

(Unit : mm)

Code No.	Product No.	A	B	C	Pcs/Pkg
0486	<b>SEN-66</b>	25	70	63	60(20)
0487	<b>SE-77</b>	45	95	67	60(20)
0488	<b>SEN-100</b>	56	112	76	20
0489	<b>SEN-140</b>	77	150	85	10

( ) shows quantities of black, gray, brown and white.




- Separation into upper and lower sections allows installation after having connected the pipe to the equipment.
- Cut lines are set to suit each pipe size for easier cutting.
- Vinyl chloride material is employed instead of conventionally used polyethylene to give higher strength, fire and weather resistance.
- Make sure to always use End Cover on all Slimduct Series. When the End Cover is not used, the upper covers on the duct may possibly slide down.

Ceiling/Wall Penetration

**SP**

**SD CEILING CAP**

Material...A.B.S

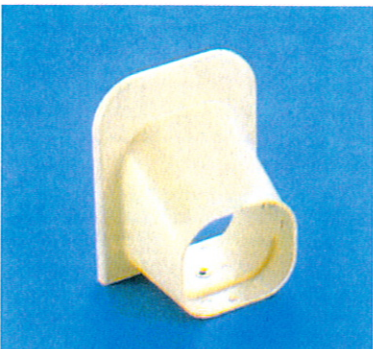


(Unit : mm)

Code No.	Product No.	A	B	C	D	Pcs/Pkg
7341	<b>SP-66</b>	95	66	95	125	20
7342	<b>SP-77</b>	110	81	100	130	20
7343	<b>SP-100</b>	135	106	107	137	10
7344	<b>SP-140</b>	175	146	117	147	5

Suitable for ceiling/wall penetration where no penetration holes can be secured on duct extension because of beam, edge, etc.

Installation

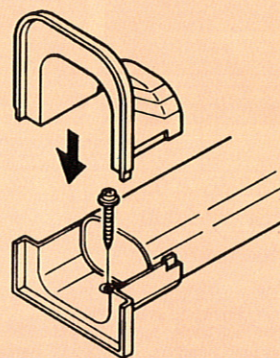

No screw is necessary for interlock.

Cross Section of Installation

