Technical Specification | Mini Pumps

Mini Aqua

Part No: FP2406







Dimensions:

Height: 28mm Width: 165mm Depth: 28mm Weight: 0.18kg

Power Supply:

- 230V AC. 16W
- 1PH 50/60 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V

In The Box:

- Mini Aqua pump
- Inline reservoir
- Inlet tube
- Vinyl tubes
- Cable ties and self adhesive velcro strips
- Drain tray connector

Other Features:

- Hall effect semi conductor level sensors, with high level safety
- Fully potted
- Thermally protected
- CE marked

Performance:

- Water flow rate: 14 litres/hour at zero head
- Maximum recommended head: 8 metres
- 21dB(A) @ 1 metre





The Mini Agua has been designed to give the installation flexibility, where the latest generation of A/C units are becoming even smaller.

The Mini Aqua is designed to be installed:


- within wall mounted evaporators
- in plastic conduit

By connecting the drain hose to the reservoir and placing the pump drive unit within the evaporator or conduit, condensate water can be pumped to a height of 8 metres.

Using the proven functionality of our other mini pumps, the Mini Aqua is also incredibly slim in size.

Measuring only 28mm in height and 28mm in depth, it is probably the smallest condensate pump in the world!

System Location:

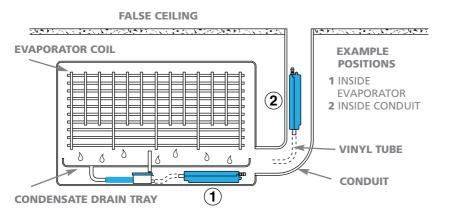



Apex Way Hailsham East Sussex BN27 3WA T: +44 (0)1323 848842 F: +44 (0)1323 848846 sales@aspenpumps.com

www.aspenpumps.com