



Technical Specification | Mini Pumps

Mini Orange

Part No: FP2212



ASPEN-5/09

Dimensions:

Height: 51mm
 Width: 107mm
 Depth: 39mm
 Weight: 0.25kg

Power Supply:

- 230V AC, 16W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V

In The Box:

- Mini Orange pump
- Reservoir
- Submersible reservoir
- Inlet tube
- Orange inlet tube and vinyl tube
- 6-pin socket lead assembly
- Cable ties and self-adhesive velcro strips
- Drain tray connector




VERTICAL SUCTION	HORIZONTAL			
	30m	60m	90m	100m Max
3m	7.2	7.0	6.6	Ltr/Hr
2m	7.3	7.1	7.1	Ltr/Hr

Other Features:

- Hall effect semi conductor level sensors, with high level safety
- Fully potted
- Thermally protected
- CE marked

Performance:

- Water flow rate: 12ltrs/hour at zero head
- Maximum recommended head: 10 metres
- 23dB(A) @ 1 metre

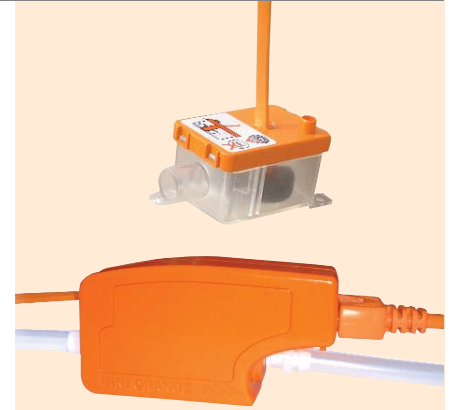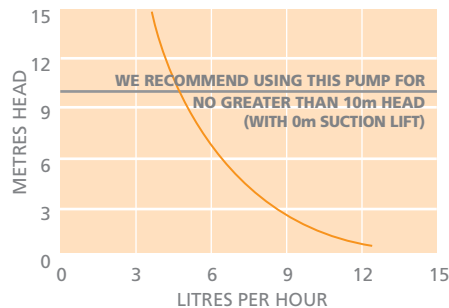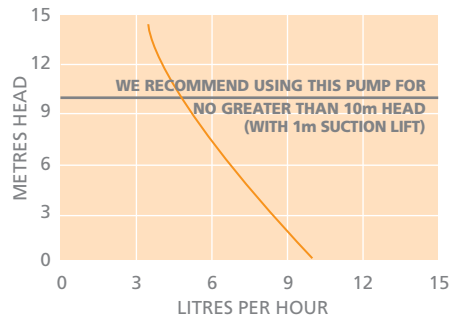


The Aspen Mini Orange pumps is designed to be installed:

- above the false ceiling where possible
- behind wall mounted evaporators
- in plastic conduit

By connecting the drain hose to the reservoir and placing the pump drive unit within the evaporator, condensate water can be pumped away to a suitable drain.

Within the Orange kit there are two reservoirs to choose from, which must sit flat and horizontal. One allows you to connect directly to the drain hose of the evaporator and the second reservoir can be placed directly into a condensate tray.

System Location:

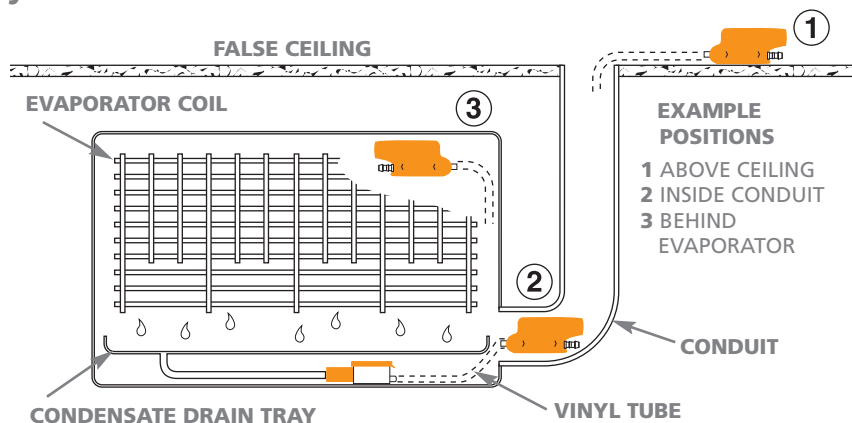

Apex Way Hailsham
 East Sussex BN27 3WA
 T: +44 (0)1323 848842
 F: +44 (0)1323 848846
 sales@aspenspumps.com
 www.aspenpumps.com